



La Mieux.

High Performance Hot-melt Moulding

LM2000S

Low-Pressure Extruder




Machine Description

- Specially developed for processing hotmelt materials.
- Available as stand-alone solution or with system.
- Compatible with all standard hotmelt handling systems.
- Other materials can also be processed, such as polyester, EVA and polyolefine.
- Continuous, gentle melting with melt-on-demand to avoid coking of the materials.
- No interruptions to the production process when replenishing.
- Short material change time; Easy maintenance and servicing

Technical Data

Items	Specification
Tank Capacity	12 Liter
Max. Melting Rate	5 Kg/HR
Max. Operation Temp.	250 °C
Max. Viscosity	20,000 CPS
Hose Number	1 Set
Size(L*W*H)	1160*600*1385 mm
Weight	200 Kg
Power	6650 Watt
Power Requirements	AC 220V/30A 50/60Hz 2Φ

Machine Size

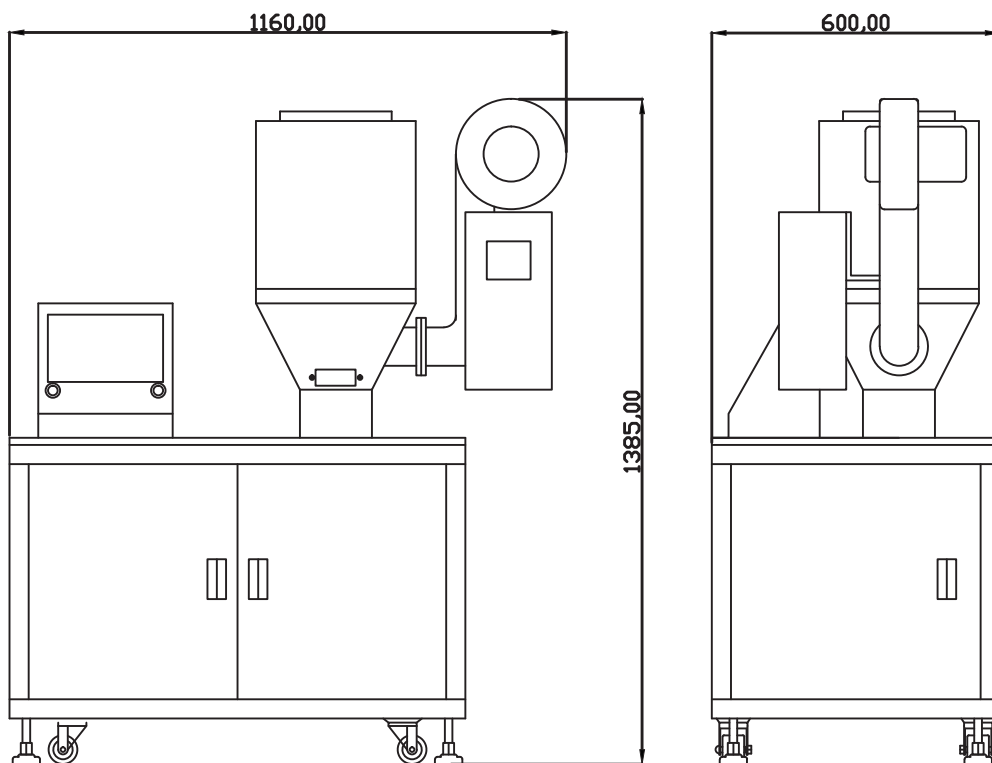

Taipei

4F-4, No.79, Sec1 Hsin Tai Wu Road,
Hsi-Chih Dist., New Taipei City, Taiwan; Zip code: 22101
TEL: +886-2-2698-1766
FAX: +886-2-2698-1755
e-mail: lamieux@ms45.hinet.net